



PLUGS - SINGLE AND MULTI-SIZE PLUGS OF SMALLER DIAMETERS

Short Plugs for House Connections with or without by-pass

Reinforced with KEVLAR
ND 20 to 305 mm
NBR rubber
With or without by-pass



Description

The **OASB Plugs** (with by-pass) and **OASTB Plugs** (without) are specially used in houses connections and small diameters from **ND 20 to 305 mm**. Manufactured with **NBR rubber reinforced with KEVLAR**.

There are several versions of **Plugs for House Connections or Short Plugs** :

- Single-size
- Multi-size
- Normal: OASB
- By-pass: OASTB.

There are many applications for single and multi-size plugs of smaller diameters **OASB** and **OASTB** :


- Air, water and smoke test
- Locating leaks using trace gas
- House connections plugging
- By-passing effluents.

Applications

- Air and water tightness tests
- Smoke test
- Locating leaks
- Pipes plugging
- By-passing effluents

Do you know ?


- **Agrippa delivers plugs with double security fittings** (different assembly according plug dimension) in order to minimize the risk of loss of plug in sewer.

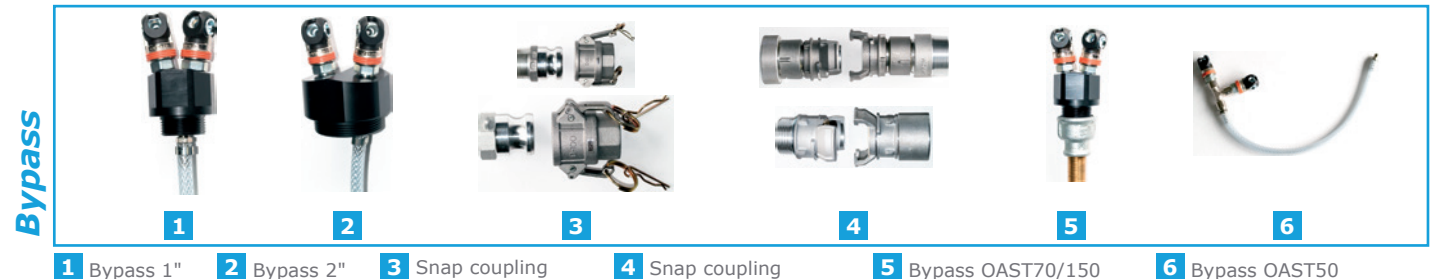

Technical data - Simples

	Minimum usage diameter (mm)	Maximum usage diameter (mm)	Required inflation pressure (bar)	Deflated plug diameter (mm)	Deflated plug length (mm)	Weight (Kg)	Inflation valve thread size	By-pass diameter (Female)
OAS20/33	20	33	2,5	19	65	0,02	/	Vg 8
OAS33/40	33	40	2,5	32	70	0,07	NA	R 1/4"
OAS50/75	50	75	2,5	45	80	0,11	NA	R 1/4"
OAS75/100	75	100	2,5	70	100	0,25	NA	R 1/4"
OASB90/200	90	200	2,5	90	150	0,50	NA	R 1/4"
OASB100/150	100	150	2,5	85	165	0,42	NA	R 1/4"
OASB150/200	150	200	2,5	142	220	1,32	NA	R 1/4"
OASB175/204	175	204	2,5	174	220	2,00	6	R 1/4"
OASB219/254	219	254	2,5	218	250	3,50	6	R 1/4"
OASB275/305	275	305	2,5	274	290	6,8	6	R 1/4"

Technical diagram

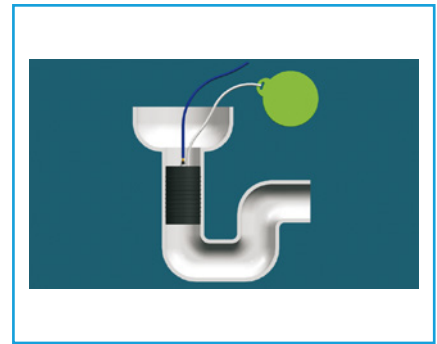

Technical data - Traversants

	Minimum usage diameter (mm)	Maximum usage diameter (mm)	Required inflation pressure (bar)	Deflated plug diameter (mm)	Deflated plug length (mm)	Weight (Kg)	Inflation valve thread size	By-pass diameter (Female)	By-pass diameter
OAST50	50	50	2,5	45	80	0,2	NA	R 1/8"	R 1/8"
OAST75/100	75	100	2,5	70	100	0,43	6	R 1/8"	R 1/2"
OASTB100/150	100	150	2,5	85	165	0,73	6	R 1/8"	R 1/2"
OASTB150/200	150	200	2,5	142	220	2,38	6	R 1/8"	R 1"
OASTB175/204	175	204	2,5	174	240	3,30	6	R 1/4"	R 2"
OASTB219/254	219	254	2,5	218	300	4,70	6	R 1/4"	R 2"
OASTB275/305	275	305	2,5	274	350	7,4	6	R 1/4"	R 2"

Technical data - Contre pression mesurée dans un tuyau sec (bar)

Hight/Diam	25	40	50	75	100	150	200	250	300	Hight/Diam	25	40	50	75	100	150	200	250	300
1"	2,2									4"- 6"					1,9	1,6			
1 1/2"		2,2								6"						2,2			
2"			1,8							6"- 8"						2,2	1,4		
2"- 3"			2	1,5						8"							1,3		
3"				1,5						10"								1,5	
3"- 4"				1,8	1,2					12"									1,8
4"					1,9														

Accessories



Non Safety inflating hose



Inflating pump



Compressor Minicat for plugs