



QUICK LOCK BIG

Stainless steel sleeve for partial sewer rehabilitation - ND 800 - 1600

ND 800 - 1600
Stainless steel V4A
Mechanical compression
EPDM rubber joint



Description

The **Quick Lock Big** is a partial rehabilitation system **without earthwork** especially developed for pipes and any kind of main sewers of **DN 800 up to 1600**.

The **Quick Lock Big** works on a basis of compression of a EPDM rubber joint and a **stainless steel sleeve**. Using the **Quick Lock Big** does not require any glue or resin. Composed of **Quick Lock Big** long life warranted products, **Quick Lock Big** lets you set up tightness wherever you have leaks or cracks narrower than 200 mm.

The mechanical steering pinion settled on the stainless steel sleeve is opened thanks to a hydraulic tool. While the hydraulic tools increase pressure, the sleeve expands and compresses the **EPDM rubber joint** against the pipe wall. The **Quick Lock Big** does not require **any specific care of polymerisation times**, water infiltration, or weather conditions. The **Quick Lock Big** can be used inside any kind of pipes. This method is environment friendly.

The materials used to manufacture the **Quick Lock Big** have proved their liability in underground works for years :

- Stainless steel **V4A type 1.457**, its quality benefits almost from an unlimited life expectancy in every environment
- EPDM rubber joint.

Specific tools have been developed to easily install QUICK LOCK BIG and grant security for users all through the process:

- Positioning laser
- Hydraulic tool.

Agrippa is the only partner in France entitled to distribute Quick Lock Big and to train users.


Applications

- Partial rehabilitation

Do you know ?

- Agrippa is the only partner in France entitled to distribute Quick Lock Big and to train users.

Composition

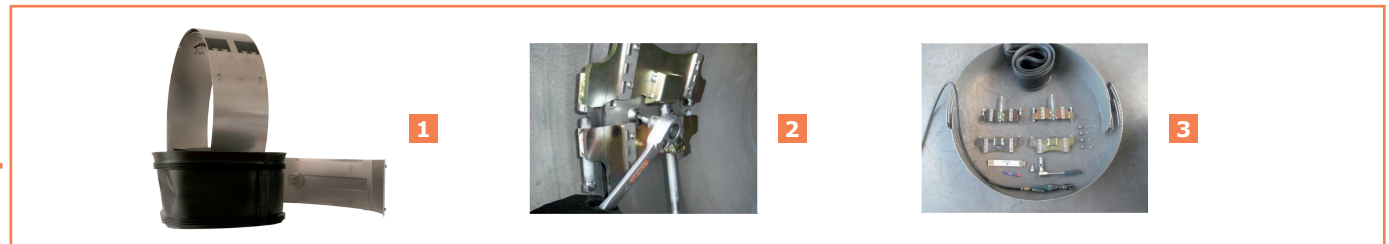

1 Consumable

2 Fixation

3 Whole kit

agrippa

290, rue Ferdinand Perrier - 69800 Saint Priest - France
Phone : 04 72 79 56 10 | Fax : 04 72 79 56 19 | sales@agrippa-sa.com
www.agrippa-sa.com

UHRIG

Technical data

Référence	Sleeve length (mm)	Rubber thickness (mm)	Minimum Pipe internal size (mm)	Maximum Pipe internal size (mm)	Weight (Kg)
800	200	3	770	830	19
900	200	3	870	930	21
1000	200	3	970	1030	23
1100	200	3	1070	1130	25
1200	200	3	1170	1230	27
1300	200	3	1270	1330	29
1400	200	3	1370	1430	31
1500	200	3	1470	1530	41
1600	200	3	1570	1630	44
1700	200	3	1670	1730	nc
1800	200	3	1770	1830	nc

Similar products



Quick Lock



Quick Lock End of Liner